

SPACINGTABEL ESKALED STRATO S DEC



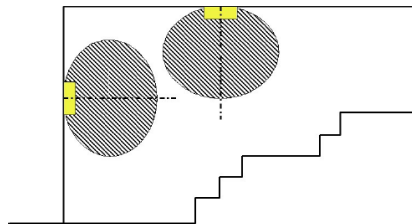
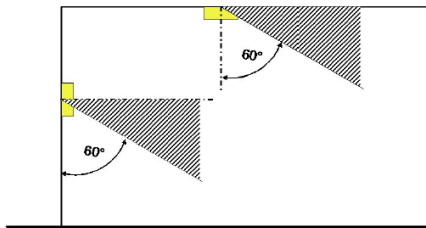
WE KNOW FIRE
WE KNOW SAFETY
WE KNOW YOU

Kleur rendering index:	0
Lichtstroom:	377 lm
Correctie factor:	1.000
Noodverlichtingfactor:	1.00
Noodverlichting lichtstroom:	377 lm
Licht output ratio:	97.30
Licht output ratio (onderste halffrond):	96.62
Licht output ratio (bovenste halffrond):	3.38








Gloed schatting (maximale lichtintensiteit [cd])

	C0	C90	C0-C360
Gamma 60° - 90°	61.3	44.7	61.3
Gamma 0° - 180°	116.0	116.0	116.0



DE SPACINGTABEL IS GEBASEERD OP DE VOLGENDE PARAMETERS:

+ Onderhoudfactor:	1.00
+ Noodverlichtingfactor:	1.00
+ Minimum verlichting op centrale lijn:	1.00 lx
+ Minimum verlichting op helft van vluchtroute breedte:	0.50 lx
+ Afwijking op de centrale lijn max.	40 : 1
+ Breedte van vluchtroute:	2.00 m

MONTAGE HOOGTE (M)					
3.00	4.90	12.40	11.77	11.12	4.46
4.00	5.27	13.65	13.00	12.34	4.81
5.00	5.43	14.51	13.86	13.21	4.98
6.00	5.43	15.07	14.43	13.78	4.98
7.00	5.25	15.37	14.73	14.09	4.79
8.00	4.87	15.43	14.78	14.15	4.40
9.00	4.20	15.24	14.60	13.95	3.74
10.00	3.01	14.80	14.15	13.50	2.60
11.00	0.00	14.08	13.41	12.76	0.00
12.00	0.00	12.38	11.35	11.35	0.00