


DATASHEET MONITOR BUTTERFLY VALVE



KNOWSLEY SK LTD

**DATASHEET –
MONITOR BUTTERFLY VALVE**

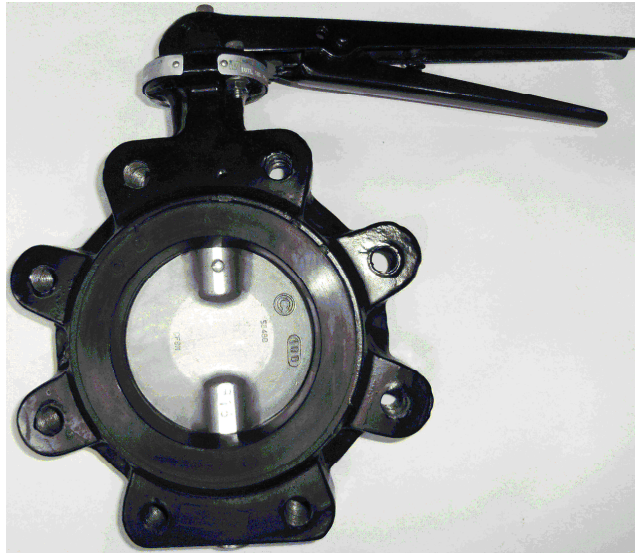

SPECIFICATION

MANUFACTURER	ACE Valves
TYPE	Lugged pattern butterfly valve – Type CLR
FLANGE SPECIFICATION	ANSI B16.5 class 150lb
LUGS	Tapped UNC
MAXIMUM WORKING PRESSURE	16 bar
MATERIAL	
Body	Al. bronze BS 1400 AB2 / ASTM B148 UNS C95800
Disc	Al. bronze BS1400 AB2 / ASTM B148 UNS C95800
Shaft	Monel K500
Seat	EPDM bonded to the body
OPERATION	Pressed Steel Lever
FINISH	Natural (Unpainted)
SIZE	4" / 100mm
QUANTITY	28 Off

GENERAL DATA

Manufactured according to API 609
Face to face API609 cat A table 1
Tested according to API598
Seat leakage bubbletight EN12266-1 rate A

NOTE: The valve shown is typical and is shown for illustrative purposes only.