

## SPACINGTABEL ESKALED SAFEWAY ADVANCE 3000 K



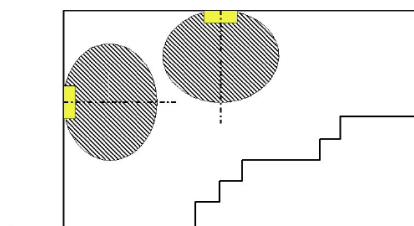
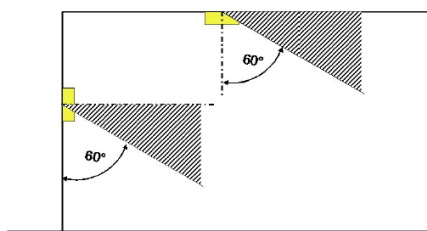
WE KNOW FIRE  
WE KNOW SAFETY  
WE KNOW YOU

Kleur rendering index:	0
Lichtstroom:	350 lm
Correctie factor:	1.000
Noodverlichtingfactor:	1.00
Noodverlichting lichtstroom:	350 lm
Licht output ratio:	99.98
Licht output ratio (onderste halfroond):	99.45
Licht output ratio (bovenste halfroond):	0.55








Gloed schatting (maximale lichtintensiteit [cd])

	C0	C90	C0-C360
Gamma 60° - 90°	53.3	53.8	54.1
Gamma 0° - 180°	118.9	118.9	118.9



### DE SPACINGTABEL IS GEBASEERD OP DE VOLGENDE PARAMETERS:

+ Onderhoudfactor:	1.00
+ Noodverlichtingfactor:	1.00
+ Minimum verlichting op centrale lijn:	1.00 lx
+ Minimum verlichting op helft van vluchtroute breedte:	0.50 lx
+ Afwijking op de centrale lijn max.	40 : 1
+ Breedte van vluchtroute:	2.00 m

MONTAGE HOOGTE (M)					
2.00	4.04	9.84	9.86	9.87	4.05
3.00	4.71	11.72	11.73	11.75	4.73
4.00	5.12	13.06	13.08	13.11	5.14
5.00	5.32	14.02	14.05	14.08	5.34
6.00	5.33	14.66	14.70	14.73	5.36
7.00	5.15	15.03	15.07	15.10	5.18
8.00	4.76	15.13	15.17	15.21	4.79
9.00	4.10	14.96	15.01	15.05	4.13
10.00	2.97	14.52	14.57	14.61	3.01